

Seat No.: \_\_\_\_\_

Enrolment No. \_\_\_\_\_

## GUJARAT TECHNOLOGICAL UNIVERSITY

BE SEM-IV Examination-Nov/Dec-2011

Subject code: 140605

Date: 02/12/2011

Subject Name: Advanced Strength of Materials

Time: 02.30 pm -5.00 pm

Total marks: 70

### Instructions:

1. Attempt all questions.
2. Make suitable assumptions wherever necessary.
3. Figures to the right indicate full marks.

- Q.1** (a) Using Castigliano's first theorem, determine the deflection and rotation of the over hanging end A of the beam loaded as shown in Fig.-(1). **07**
- (b) A 600 mm x 210mm R.S.B. is freely supported at the ends over a span of 8 m. Construct the deflection influence line for the section at 2m from the rigid end, given  $I$  for the section =  $7.29 \times 10^8 \text{ mm}^4$  and  $E = 2 \times 10^5 \text{ N/mm}^2$ . Three equal point loads of 80 kN each, spaced 2 m apart, between consecutive loads cross the beam from left to right. Calculate the deflection at this section when the leading load is on it. **07**

- Q.2** (a) Two similar round bars A and B are each 30 cm long as shown in Fig.-(2). The bar A receives an axial blow, which produces a maximum stress of  $2000 \text{ kg/cm}^2$ . Find the maximum stress produced by the same blow on the bar B. If the bar B is also stressed to  $2000 \text{ kg/cm}^2$ , determine the ratio of energies stored by the bars B and A. **07**
- (b) A square pin is required to resist a pull of 40 kN and shear force of 15 kN. Derive a suitable section according to strain energy theory. Maximum tensile stress is 350 MPa and Poisson's ratio is 0.3. Take a factor of safety of 3.0. **07**

OR

- (b) A thin spherical shell has 400 mm diameter and wall thickness  $t$ . It is subjected to internal pressure of 5 MPa. The material has yield strength of 265 MPa. Determine thickness of the shell as per distortion energy theory of failure. Take factor of safety of 2.5. **07**
- Q.3** (a) A close coiled helical spring is to carry a load of 10 kg and the mean coil diameter is to be 8 times that of the wire diameter. Calculate these diameters, if the maximum stress is to be  $1 \text{ t/m}^2$ . **07**
- (b) A vehicle weight 40 kN and running at 1.5 meter per second has to be brought to rest by a buffer spring. Find the number of springs of 20 coils each required to absorb the energy of motion during a compression of 250 mm. Each spring is made of 20mm diameter rod forming a coil of 200 mm mean diameter. Take  $G = 85 \text{ GPa}$ . **07**

OR

- Q.3** (a) A flat spring of rectangular section wire 10 mm x 0.5 mm has a length of 300 mm. If the maximum bending stress is limited to 600 MPa. Find : (a) maximum couple that can be exerted at the spindle, (b) maximum bending moment in the spring. (c) the number of turns required to wind up the spring. Take  $E = 200 \text{ GN/m}^2$ . **07**

- (b) A cantilever type laminated spring (quaterelleptic) has a span of 0.5 m. If each leaf be 8 mm thick and 72 mm wide, Find the number of leaves so that the spring deflects 60 mm under an end load of 3 kN. Determine maximum bending stress at this load. Also determine the height from which this load may be allowed to fall so that maximum bending stress induced is  $700 \text{ N/mm}^2$ . Take  $E = 2 \times 10^5 \text{ N/mm}^2$ . 07
- Q.4** (a) A cast iron pipe of 40 cm internal diameter and 10 cm thickness carries water under a pressure of  $80 \text{ kg/cm}^2$ . Determine the maximum and minimum intensities of hoop stress across the section. Also sketch the radial pressure distribution and hoop stress distribution across the section. 07
- (b) Write comparison between thin shell and thick shell theory. 07
- OR**
- Q.4** (a) State and explain Lamé's theorem. 07
- (b) The maximum stress permitted in a thick cylinder, radii 8 cm, is 12 cm, is  $20 \text{ N/mm}^2$ , the external pressure is  $6 \text{ N/mm}^2$ , what internal pressure can be applied? Plot curves showing the variation of hoop and radial stresses through the material. 07
- Q.5** (a) A crane hook carries a load of 10 kN, the centre line of load being at a horizontal distance of 40 mm from the inside edge of a horizontal section through the centre of curvature, the centre of curvature being is load line. The horizontal section is a trapezium whose parallel sides are 15 mm and 25 mm and height is 35 mm. Find the stresses developed in the hook. 07
- (b) Write comparison of bending of straight members and bending of curved members. 07
- OR**
- Q.5** (a) A beam of triangular cross section having base width of 100 mm and height of 150 mm is subjected to a shear force of 150 kN. Find the value of maximum shear stress, and sketch the shear stress distribution along the depth of beam. 07
- (b) A uniform thickness flat disc of 800 mm in diameter is shrunk fitted on a solid steel shaft of 160 mm diameter. The shrink fit pressure is 100 MPa. Calculate: (i) Interference allowance, (ii) RPM at which disc will loosen on the shaft, (iii) Stress at the inner radius at half the speed at (ii). 07

\*\*\*\*\*

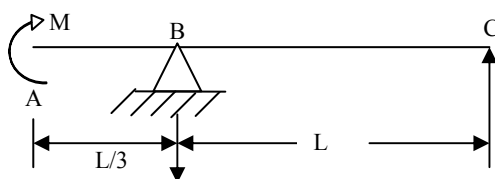


Fig.-(1) Q.1(a)

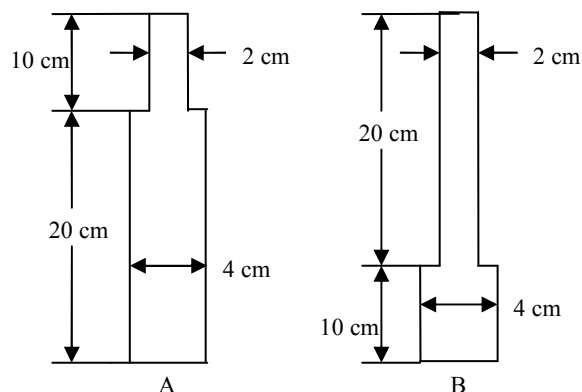


Fig.-(2) Q.2(a)