

GUJARAT TECHNOLOGICAL UNIVERSITY
BE - SEMESTER-IV • EXAMINATION – WINTER 2013

Subject Code: 140902**Date: 23-12-2013****Subject Name: Electrical Power****Time: 02:30 pm to 05:00 pm****Total Marks: 70****Instructions:**

1. Attempt all questions.
2. Make suitable assumptions wherever necessary.
3. Figures to the right indicate full marks.

- Q.1** (a) Coal has an average energy content of 940W. Years/ton, and natural gas has an energy content of 0.036 W· year/ft³. If 80 percent of the net energy requirement of 2.82×10^6 GWh were to be met with coal and 20 percent with gas, what amounts of coal and gas would be required? **07**
- (b) Each line of a 3-phase system is suspended by a string of 3 similar insulators. If the voltage across the line unit is 17.5 kV, calculate the line to neutral voltage. Assume that the shunt capacitance between each insulator and earth is 1/8th of the capacitance of the insulator itself. Also find the string efficiency. **07**
- Q.2** (a) Find the inductance per unit length of the single-phase line shown in Fig. 1. Conductors *a*, *b*, and *c* are of 0.2 cm radius, and conductors *d* and *e* are of 0.4 cm radius. **07**
- (b) What are the advantages and disadvantages of nuclear power plant? **07**
- OR
- (b) What do you understand by thermal shielding? Also explain the functions of a reflector. **07**
- Q.3** (a) Mention the advantages and disadvantages of a diesel power plant over a gas turbine power plant. **07**
- (b) One million cubic meters of water is stored in a reservoir feeding a water turbine. If the centre of mass of the water is 50 m above the turbine and losses are negligible, how much energy (in mega watt hours) will that volume of water produce? The density of water is 993 kg/m³ **07**
- OR
- Q.3** (a) Give the advantages and disadvantages of open cycle gas turbine power plant. Also state advantages and disadvantages and applications of solar power **07**
- (b) A 3-phase, 50 Hz, 400 V motor develops 100 H.P. (74.6 kW), the power factor being 0.75 lagging and efficiency 93%. A bank of capacitors is connected in delta across the supply terminals and power factor raised to 0.95 lagging. Each of the capacitance units is built of 4 similar 100 V capacitors. Determine the capacitance of each capacitor. **07**
- Q.4** (a) Derive an expression for most economical power factor. **07**
- (b) A 2-wire d.c. distributor AB is fed from both ends. At feeding point A, the voltage is maintained as at 230 V and at B 235 V. The total length of the distributor is 200 metres and loads are tapped off as under :25 A at 50 metres from A ; 50 A at 75 metres from A 30 A at 100 metres from A ; 40 A at 150 metres from A ,the resistance per kilometre of one conductor is 0.3 Ω. Calculate (i) currents in various sections of the distributor **07**
- (ii) minimum voltage and the point at which it occurs

OR

- Q.4 (a)** Draw and explain the construction of pin type insulator. Also Explain How does skin effect vary with conductor material ? **07**
- Q.4 (b)** A single phase a.c. distributor AB 300 metres long is fed from end A and is loaded as under : (i) 100 A at 0.707 p.f. lagging 200 m from point A (ii) 200 A at 0.8 p.f. lagging 300 m from point A The load resistance and reactance of the distributor is 0.2Ω and 0.1Ω per kilometre. Calculate the total voltage drop in the distributor. The load power factors refer to the voltage at the far end. **07**
- Q.5 (a)** Draw and explain the general construction of an underground cable. Also only draw key diagram of 66Kv/ 11Kv substation **07**
- (b)** Explain the working principle of wind turbine with the schematic diagram. **07**
- OR
- Q.5 (a)** Explain in brief about the classification of substation also differentiate between indoor substation and outdoor substation **07**
- (b)** Derive the expression for power loss in the distributor which is uniformly loaded with: **07**
- a) fed at one end
- b) feed at both ends with equal voltage

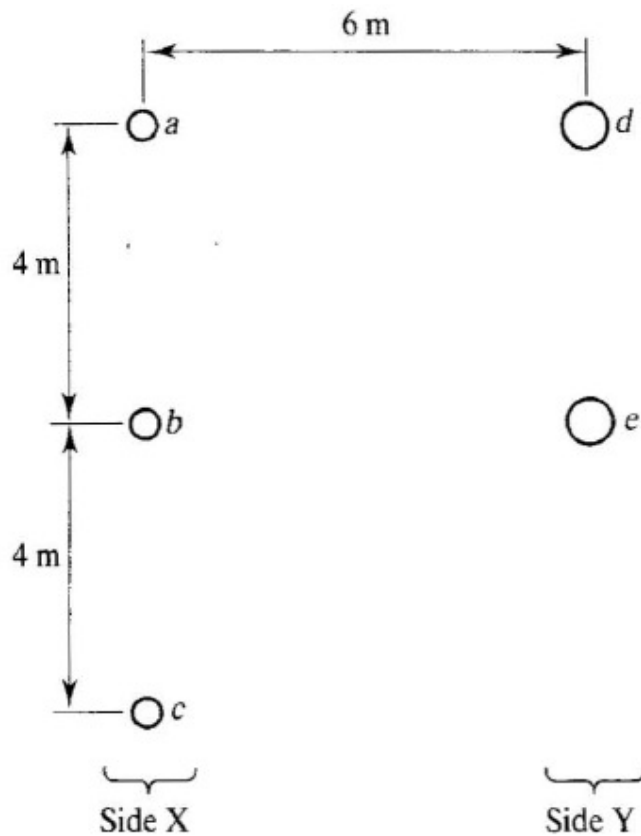


Fig.1
