

GUJARAT TECHNOLOGICAL UNIVERSITY
BE - SEMESTER-VI • EXAMINATION – WINTER 2013

Subject Code: 160802**Date: 29-11-2013****Subject Name: Electronic Communication****Time: 02:30 pm to 05:00 pm****Total Marks: 70****Instructions:**

1. Attempt all questions.
2. Make suitable assumptions wherever necessary.
3. Figures to the right indicate full marks.

- Q.1** (a) 1. What is the difference between communication and telecommunication systems? Explain the importance and applications of communication. **04**
 2. Describe the concept of bandwidth and state the bandwidth of different signals. **03**
 (b) Draw the circuit diagram of high frequency transformer and derive the equation for transfer impedances. **07**

- Q.2** (a) Explain the signal to noise ratio [SNR] of an amplifier and effect of amplification on the SNR. **07**
 (b) A coil has a series resistance of 10Ω , a self capacitance of 28 pF and an inductance of $2\text{ }\mu\text{H}$. Determine the effective inductance and effective Q-factor when coil forms part of series tuned circuits resonant at 12 MHz . **07**

OR

- (b) Explain thermal noise resistor in series. Two resistors $5\text{ K }\Omega$ and $40\text{ K }\Omega$ are at room temperature $[290\text{ K}]$ for a bandwidth of 150 KHz . Calculate thermal noise for each resistor, if two resistors are connected in series. **07**
- Q.3** (a) Explain functions of receiver and their types. **07**
 (b) Obtain the Fourier transform of cosine wave having frequency f_0 and peak amplitude of unity and plots its spectrum. Refer fig (a) **07**

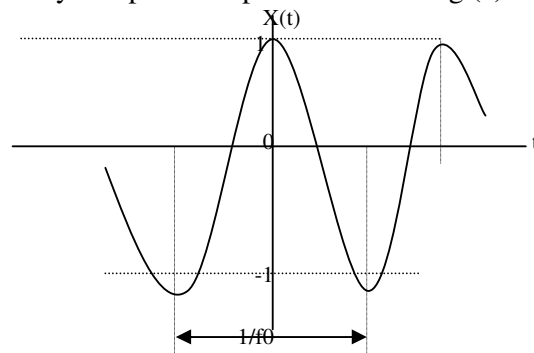


Fig. (a)

OR

- Q.3** (a) What is signal and classify of signals. List the standard continuous Time and Discrete Time signal and explain with sketches. **07**
 (b) The frequency span to be received by a receiver is from 525 KHz to 1650 KHz . If $C_{\min}$ of tuning circuit is limited to 50 pF by a trimmer of 25 pF , calculate the value of padder capacitor, if the maximum value of variable capacitor is 450 pF . The IF used is 465 KHz . **07**
- Q.4** (a) Draw the AM wave forms for less than 100%, with 100%, more than 100% and with 0% modulation. Assume that the modulating signal is a pure sine wave. And compare the wave forms. How to achieve this? **07**
 (b) Explain the Armstrong method of FM generation with neat diagram. **07**

OR

- Q.4** (a) Explain phase locked loop and vestigial side band transmissions. **07**
(b) Give comparison of FM and PM systems. In FM system, the modulating frequency is 500Hz and modulating voltage is 3.6 V with modulating index 65. Calculate maximum frequency deviation. What will be the modulation index when modulating frequency is 235 Hz and modulation voltage is 5 V? **07**

- Q.5** (a) What is Transponder? Explain various Transponders. **07**
(b) Explain polarization of satellite signal. **07**

OR

- Q.5** (a) Explain inclined orbits and its various measures of time. **07**
(b) 1. Calculate the radius of a circular orbit for which the period is 1 day. **07**
2. Determine which of the following years are leap year,
(a) 1987 (b) 1988 (c) 2000 (d) 2100.
